
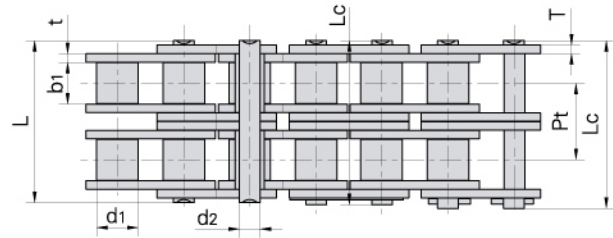


# Other roller chains

## Andere Rollenketten

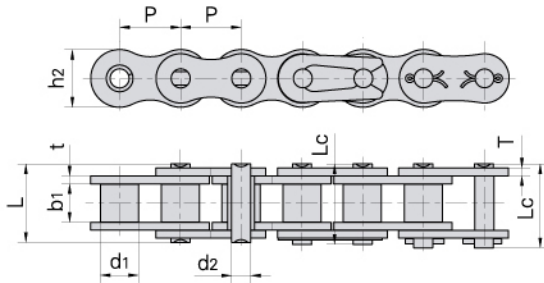

Donghua Chain No. <i>Donghua Ketten Nr.</i>	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Inner plate depth	Plate thickness	Transverse pitch	Ultimate tensile strength	Average tensile strength	Weight per meter	
	<i>Teilung</i>	<i>Rollen-durchmesser</i>	<i>Innere Breite</i>	<i>Bolzen-durchmesser</i>	<i>Bolzen-länge</i>	<i>L</i>	<i>Lc</i>	<i>Innen-laschen-höhe</i>	<i>Laschen-dicke</i>	<i>Mitten-abstand</i>	<i>Min. Bruchkraft</i>	<i>Durchschn. Bruchkraft</i>	<i>Gewicht</i>
	P mm	d1 max mm	b1 min mm	d2 max mm	L max mm	Lc max mm	h2 max mm	t/T max mm	Pt mm	Q min kN/LB	Q0 kN	q kg/m	
A06B-2	9.525	6.35	5.72	3.28	23.4	24.40	8.20	1.30	10.24	16.90/3841	18.7	0.75	
06BF30-2	9.525	6.35	5.40	3.28	23.7	23.70	9.60	1.60	10.24	16.5/3748	18.15	1.05	
415	12.700	7.77	4.76	3.60	11.0	12.40	9.70	1.00	-	6.86/1559	7.6	0.32	
415H	12.700	7.77	4.76	3.96	13.1	14.50	12.00	1.50	-	14.40/3273	16.1	0.55	
415B	12.700	7.75	4.88	4.09	12.9	14.40	10.30	1.30	-	12.00/2727	14.2	0.45	
415BF1	12.700	7.75	4.88	4.09	11.5	13.00	10.30	1.00	-	9.00/2045	10.6	0.38	
415BF3	12.700	7.75	4.80	4.09	11.6	13.65	10.30	1.20	-	9.80/2227	10.7	0.43	
415BF5	12.700	7.75	5.10	4.09	14.4	16.00	9.90	1.8/1.6	-	16.00/3600	16.5	0.46	
415BF7	12.700	7.75	4.88	3.58	13.8	15.00	10.30	1.30	-	6.00/1363	10.7	0.40	
423	12.700	8.51	6.40	4.45	15.6	17.10	12.40	1.70	-	19.60/4455	21.9	0.71	
478	12.700	7.80	4.80	4.00	11.6	13.65	10.46	1.25	-	9.80/2227	12.8	0.39	
170GSX	12.700	7.75	6.45	3.96	14.8	16.40	11.50	1.6/1.4	-	17.15/3860	18.5	0.62	
205	12.700	8.51	6.40	4.45	15.2	16.30	11.80	1.6/1.3	-	18.00/4049	19.0	0.85	
08BF	12.700	8.51	5.55	4.45	14.6	16.10	11.80	1.60	-	17.80/4045	19.2	0.66	
10AF13	15.875	10.16	16.31	5.08	27.6	29.10	15.09	2.03	-	21.8/4952	23.9	1.35	
10AF50	15.875	14.20	19.40	5.08	30.9	32.60	13.00	2.03	-	16.4/3726	18.0	2.14	
12BF14	19.050	12.07	30.56	5.72	42.0	43.60	16.00	1.85	-	29.00/6591	32.2	2.13	
515	19.050	12.07	13.50	5.72	28.6	31.30	16.20	3.00	-	30.0/6748	33.0	1.83	
12BF58	19.050	12.70	31.40	5.72	43.5	46.20	16.00	2.03	-	29.00/6591	32.2	2.36	
14BF1	22.225	14.30	14.60	9.00	36.3	38.00	23.50	4.8/4.0	-	75.0/16871	82.5	3.59	
16BF1	25.400	15.88	12.20	8.28	31.4	32.70	21.00	4.15/3.1	-	60.00/13636	71.4	2.51	
16BF2	25.400	15.88	17.02	8.28	38.6	39.80	21.00	4.15	-	60.00/13636	71.4	3.08	
16BF5	25.400	15.88	12.70	8.28	30.8	32.10	20.00	3.5/3.0	-	50.00/11364	57.5	2.37	
16AF52	25.400	15.88	78.00	7.92	95.6	99.10	24.00	3.25	-	56.7/12882	62.0	6.46	
16AF62	25.400	15.88	47.00	7.92	64.3	67.80	24.00	3.25	-	56.7/12882	62.0	4.29	
16AF93	25.400	15.88	12.70	7.92	25.0	28.50	20.50	2.03	-	28.0/63616	30.8	1.74	
20AFT-2	31.750	19.05	18.90	9.53	76.4	80.50	30.10	4.00	35.76	211.68/48093	232.0	8.09	
20AF22	31.750	19.05	18.90	9.53	44.7	44.70	30.00	4.00	-	50/11360	55.0	3.97	
20BF14	31.750	19.05	19.56	10.19	45.6	49.30	26.40	5.6/4.5	-	105/23856	115.5	4.57	
24BHF5	38.100	25.40	25.40	14.63	64.6	69.10	36.20	9/7.5	-	270/61344	297.0	10.60	
28AF1-2	44.450	25.40	25.22	12.70	103.3	112.20	41.00	5.60	48.87	338.1/76816	371.9	15.06	
32AF2	50.800	32.00	31.75	17.00	64.8	69.60	48.00	6.40	-	200.00/45454	222.5	11.61	
32AT	50.800	28.58	15.88	14.27	36.2	40.80	47.80	3.25	-	111.2 0/25272	123.6	5.21	